

GENERATOR

Standard Generator

- High Fuel Efficiency
- Ultimate Durability
 - 100% Copper Wire for Alternator
 - Anti-Rusty fuel tank
 - Full roll cage for ultimate protection
- Less Vibration & Quiet Operation
- All models have oil alert function.



Specification



Model	GV-3000	GV-7000S	GV-3200	GV-7600S	
GENERATOR	Phase				
	Voltage Regulation				
	AVR				
	Single				
	Rated Output	2 kVA	5 kVA	2.3 kVA	5.5 kVA
	Maximum Output	2.2 kVA	5.5 kVA	2.5 kVA	6 kVA
	Rated Frequency	50 Hz		60 Hz	
	Rated Voltage	220 V			
	Rated Ampere	9.1A	22.7 A	10.5 A	25 A
	DC Output	12 V/8.3 A			
Continuous Running Time (rated load)	9.5 h	7.5 h	6.3 h	5 h	
Tank Capacity	12.6 L	22.6 L	12.6 L	22.6 L	
Receptacle	 European socket, CEE 7/4, 2pcs	 European socket, CEE 7/4, 1pc NEMA L6-30 Socket, 1pc	 BS1363, 2pcs OR CEE 7/4, 2pcs	 BS1363, 2pcs OR CEE 7/4 NEMA L6-30	
ENGINE	Model	Koshin K210	Koshin K420	Koshin K210	Koshin K420
	Type	Air-cooled, 4-stroke, OHV, single cylinder			
	Displacement	212 cc	420 cc	212 cc	420 cc
	Oil Alert System	Standard			
	Starting system	Recoil	Recoil/Electric starter	Recoil	Recoil/Electric starter
	Battery	—	Maintenance-free type	—	Maintenance-free type
Wheel Kit	—	Standard	—	Standard	
Net Weigh	42 kg (93 lbs)	85 kg (187 lbs)	42.6 kg (94 lbs)	85 kg (187 lbs)	
Gross Weigh	44 kg (97 lbs)	87 kg (192 lbs)	45 kg (99 lbs)	89 kg (196 lbs)	
Dimensions L×W×H (mm)	615 × 445 × 457	695 × 534 × 547	615 × 445 × 457	695 × 534 × 547	
Packing Unit	1				

*GV-7000S/GV-7600S without battery

- All model have GFCI protection.
- Equipped with CO sensor with automatic shutdown



MULTI DISPLAY

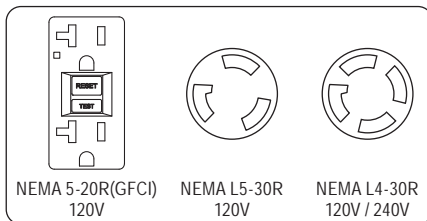

GV-8000S



GV-6000S


*Battery Not Included

Specification

Model	GV-6000S	GV-8000S	
Phase		Single	
Voltage Regulation		AVR	
AC	Rated Output	5500 W(VA)	7200 W(VA)
	Maximum Output	6000 W(VA)	8000 W(VA)
	Rated Frequency		60 Hz
	Rated Voltage		120 V/240 V
	Rated Ampere	45.8 A / 22.9 A	60.0 A / 30.0 A
DC Output		8.3 A/12 V/100 W	
GENERATOR	Continuous Running Time (rated load)	4.6 hr	4.2 h
	Tank Capacity		22.6 L (6.0 gal)
	Receptacle	 NEMA 5-20R(GFCI) ×2 120V	 NEMA L5-30R ×1 120V
ENGINE	Model	Koshin R420-V	
	Type	Air-cooled, 4-stroke, OHV, single cylinder	
	Displacement	419 cc	
	Oil Alert System	Standard	
	Starting system	Recoil/Electric starter	
Battery	12V Motorcycle Battery : 9 Ah		
Wheel Kit	Standard (No Flat Tire)		
Net Weigh	83 kg (183.0 lb)	86 kg (189.6 lb)	
Gross Weigh	89.6 kg (197.5 lb)	92.1 kg (203.0 lb)	
Dimensions L×W×H (mm)	734 × 714 × 630		
Packing Unit	1		

GENERATOR

- All model have GFCI protection.
- Equipped with CO sensor with automatic shutdown



MULTI DISPLAY



GV-3300iS only

- One Push Start (Electric Starter) and auto choke.



GV-3300i








GV-2000i



GV-3300iS

Specification

Model (Destination Area)	GV-2000SE (Europe)	GV-3300i (Europe)	GV-2000i (North America)	GV-3300i (North America)	GV3300iS (North America)	
Phase	Single					
Voltage Regulation	Inverter					
AC	Rated Output	1600 W(VA)	3000 W(VA)	1800 W(VA)	3000 W(VA)	
	Maximum Output	1800 W(VA)	3300 W(VA)	2000 W(VA)	3300 W(VA)	
	Rated Frequency	50 Hz		60 Hz		
	Rated Voltage	230 V		120 V		
	Rated Ampere	6.9 A	13 A	15 A	25 A	
DC Output	5 V USB (2.1A, 1A)					
GENERATOR	Continuous Running Time (rated load)	3.1 hr	5.0 hr	4.0 hr		
	Tank Capacity	3.4 L	9.8 L	4.2 L (1.1 gal)	8.3 L (2.2 gal)	
RECEPTACLE						
	Receptacle	European socket, CEE 7/4, 1pc	European socket, CEE 7/4, 2pcs	NEMA 5-20R(GFCI) x1 120V	NEMA 5-20R(GFCI) x1 120V	NEMA L5-30R x1 120V
ENGINE	Model	Koshin K80-i2	Koshin R210-Vi	Koshin K80-1	Koshin K210-V	
	Type	Forced Air-cooled, 4-stroke, OHV, single cylinder		Air-cooled, 4-stroke, OHV, single cylinder		
	Displacement	79.7 cc	212 cc	79 cc	212 cc	
	Oil Alert System	Standard				
	Starting system	Recoil starter			Recoil/Electric starter	
Battery	—					
Wheel Kit	—	Standard	—	Standard		
Net Weigh	18 kg (39.7 lb)	44 kg (97 lb)	22 kg (48.5 lb)	44 kg (97 lb)	50 kg (110.2 lb)	
Gross Weigh	23 kg (50.7 lb)	52 kg (114.6 lb)	25 kg (55.1 lb)	52 kg (114.6 lb)	61 kg (134.4 lb)	
Dimensions L×W×H (mm)	480 × 275 × 450	590 × 475 × 525	498 × 300 × 467	589 × 475 × 523	589 × 508 × 615	
Packing Unit	1					